

TFX12V, SFX12V, ATX12V

BESONDERHEITEN

Artikelname DPS250AB-18E

Beschreibungen TFX12V 1.1

8cm Lüfter

175 (B) x 65 (H) x 85 (L) mm

Spezifikationen Input range: 90 ~ 135Vac; 180 ~ 265Vac

Frequency: 47-63Hz.

Efficiency: 68% at input 230Vac and output full load

Passive PFC

Anschlüsse 1x 24PIN (easy to 20) Power Connector

1x 4PIN P4 Power Connector

2x SATA, 2x Molex, 1x Floppy


Zertifikat UL/CUL, TÜV, CE, Nemko, BSMI




DPS250AB-18E



DPS300AB-9B

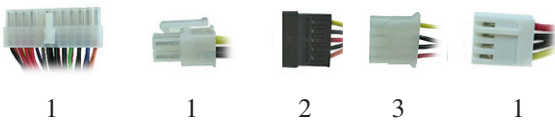

GPS400AB-C

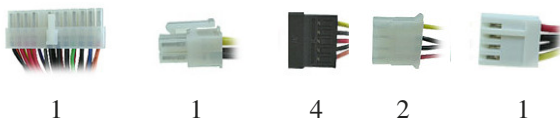

BESONDERHEITEN

Artikelname DPS300AB-9B

Beschreibungen SFX12V

8cm Lüfter

Active PFC

100 (B) x 63.5 (H) x 125 (L) mm

Spezifikationen Input range: 100-127V~/6A 200-240V~/3A

Frequency: 50-60Hz.

Efficiency: >70 @ 115/230 Vac

Active PFC

Anschlüsse 1x 24PIN (easy to 20) Power Connector

1x 4PIN P4 Power Connector

2x SATA, 3x Molex, 1x Floppy

Zertifikat UL/CUL, TÜV, CE, Nemko, BSMI

BESONDERHEITEN

Artikelname GPS400AB-C

Beschreibungen ATX12V 2.2V

12cm Lüfter

Passive PFC

150 (B) x 85 (H) x 140 (L) mm

Spezifikationen Input range: 100~130Vac/200-260Vac

Frequency: 50~60Hz.

Input current: 115V~/10A, 230~/5A

Efficiency: >70% @ Max. Load, 230Vac

Peak Output: Max. 400W

Fan Speed Control

Anschlüsse 1x 24PIN Power, 1x 4PIN P4 Power Connector,

4x SATA, 2x Molex, 1x Floppy

Zertifikat UL/CUL, TUV, CE, FCC, Nemko, CCC, BSMI


ATX12V



GPS450AB-100A



GPS550AB-A

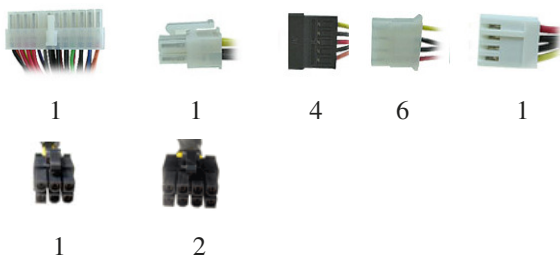

BESONDERHEITEN

Artikelname GPS450AB-100A

Beschreibungen ATX12V 2.0V

12cm Lüfter

Active PFC, Full Range

150 (B) x 86 (H) x 140 (L) mm

Spezifikationen Input range: 100-127V~/9A 200-240V~/4.5A

Frequency: 47~63Hz.

Input current: < 9A@115 Vac, < 4.5A@230 Vac

Efficiency: >70% @ Max. Load, 230Vac

Output: Max. 450W

Active PFC

Fan Speed Control

Anschlüsse 1x 24PIN Power Connector

1x 4PIN P4 Power Connector

1x 6PIN, 2x SATA, 7x Molex, 2x Floppy

Zertifikat UL/CUL, TÜV, CE, Nemko, BSMI

BESONDERHEITEN

Artikelname GPS550AB-A

Beschreibungen ATX12V 2.0V und EPS12V

12cm Lüfter

Active PFC, Full Range

150 (B) x 85 (H) x 140 (L) mm

Spezifikationen Input range: 115V~/10A 220-230V~/5A

Frequency: 47~63Hz.

Input current: < 10A@115 Vac, < 15A@230 Vac

Efficiency: >70% @ Max. Load, 230Vac

Output: Max. 550W

Active PFC

Fan Speed Control

Anschlüsse 1x 24PIN Power, 1x 8PIN, 2x 6PIN PCI-E, 1x 4PIN P4

Power Connector, 4x SATA, 6x Molex, 1x Floppy

Zertifikat UL/CUL, TUV, CE, FCC, Nemko, CCC, BSMI



ATX12V



FSP400PNF



1 1 1 4 2

BESONDERHEITEN

Artikelname FSP400PNF

Beschreibungen 150 (B) x 86 (H) x 140 (L) mm
12cm Lüfter

Spezifikationen Input range: 230VAC

Frequency: 50Hz

Input current: 5.0A@230Vac, 50Hz

Efficiency 70% min.

Output: Maximum power (1) Max. 348Watts

Anschlüsse 1x 24 (easy to 20) PIN Power Connector


1x 4PIN P4 Power Connector

4x Molex, 1x SATA, 2x Floppy

Zertifikat UL, CSA, TÜV, NEMKO, CB & FCC, BSMI



FSP350-60GLN



1 1 1 6 2

BESONDERHEITEN

Artikelname FSP350-60GLN

Beschreibungen 150 (B) x 86 (H) x 140 (L) mm
12cm Lüfter

Active PFC

Spezifikationen Input range: 110-240VAC

Frequency: 47-63Hz

Input current: 3.5A / 1.5A

Efficiency: 75% min.

Anschlüsse 1x 24 (easy to 20) PIN Power Connector

1x 4PIN P4 Power Connector

6x Molex, 1x SATA, 2x Floppy,

Zertifikat UL, CSA, TÜV, CB, CE



FSP400-60GLN



1 1 1 6 2

BESONDERHEITEN

Artikelname FSP400-60GLN

Beschreibungen 150 (B) x 86 (H) x 140 (L) mm
12cm Lüfter

Active PFC

Spezifikationen Input range: 110-240VAC

Frequency: 47-63Hz

Input current: 3.5A / 1.5A

Efficiency: 75% min.

Anschlüsse 1x 24 (easy to 20) PIN Power Connector

1x 4PIN P4 Power Connector

6x Molex, 1x SATA, 2x Floppy,

Zertifikat UL, CSA, TÜV, CB, CE




Power Supply

ATX12V



FSP700-80GLN

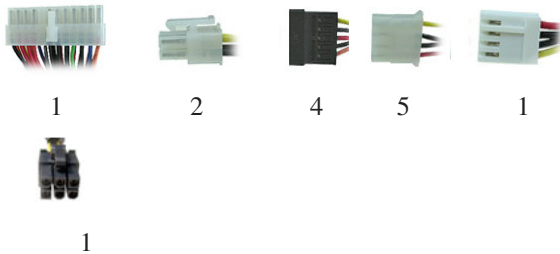

BESONDERHEITEN

Artikelname FSP700-80GLN

Beschreibungen 150 (B) x 86 (H) x 140 (L) mm

12cm Lüfter

Extrem leise

Active PFC, Full Range

Spezifikationen Input range: 100-240VAC

Frequency: 50-60Hz

Input current: 7.0A@115VAC, 3.5.0A@230VAC, 50Hz

Efficiency 75% min. 115VAC, 78% min. 230VAC

Output: Maximum power (1) Max. 700Watts

Anschlüsse 1x 24 (easy to 20) PIN Power Connector

2x 4PIN P4 Power Connector

1x PCI-E, 4x SATA, 5x Molex, 1x Floppy

Zertifikat NEMKO, TÜV, CSA, IEC, CE

BESONDERHEITEN



P1G-6300P

Artikelname P1G-6300P

Beschreibungen 40.5 (H) x 100 (W) x 205 (D) mm

Dual 40 mm DC FAN

Temperature Range : Operating 0°C --- 40°C

Hold up time: 16 ms minimum at full load & normal input voltage

Power good signal: On delay 100 ms to 500 ms, off delay 1 ms

Over load protection: 130 +/-20%

Meet IEC-1000-3-2 CLASS D (Active PFC)

Spezifikationen Voltage: 90—264 Vac Full range

Frequenzy: 47—63 Hz

Input current: 6A (RMS) for 110 Vac

3A (RMS) for 220 Vac

Inrush current: 60A max. for 110 Vac

80A max. for 220 Vac

Zertifikat UL 1950, CSA 22.2 NO/ 950, TUV IEC 950



P2G-6510P

BESONDERHEITEN

Artikellame P2G-6510P

Beschreibungen 70 (H) x 100 (W) x 240 (D) mm

One 60 mm DC FAN

Temperature Range : Operating 0°C --- 40°C

Hold up time: 16 ms minimum at full load & normal input voltage

Power good signal: On delay 100 ms to 500 ms, off delay 1 ms

Over load protection: 130 +/-20%

Meet IEC-1000-3-2 CLASS D (Active PFC)

Spezifikationen Voltage: 90—264 Vac Full range

Frequenzy: 47—63 Hz

Input current: 8A (RMS) for 115 Vac

4A (RMS) for 230 Vac

Inrush current: 55A max. for 115 Vac

110A max. for 230 Vac



R3G-6650P

BESONDERHEITEN

Artikelname R3G-6650P

Beschreibungen 82 (H) x 127 (W) x 276(D) mm

Three 40 mm DC FAN

Temperature Range : Operating 0°C --- 40°C

Hold up time: 16 ms minimum at full load & normal input voltage

Power good signal: On delay 100 ms to 500 ms, off delay 1 ms

Over load protection: 130 +/-20%

Meet IEC-1000-3-2 CLASS D (Active PFC)

Spezifikationen Voltage: 90—264 Vac Full range

Frequenzy: 47—63 Hz

Input current: 9A (RMS) for 115 Vac

5A (RMS) for 230 Vac

Inrush current: 80A max. for 115 Vac

100A max. for 230 Vac

Zertifikat UL 1950, CSA 22.2 NO/ 950, TUV IEC 950



MX3-6600P

BESONDERHEITEN

Artikelname MX3-6600P

Beschreibungen 82 (H) x 150 (B) x 254 (T) mm

3x 40 mm DC Lüfter (1x in jedem Modul)

Temperature Range : Operating 0°C --- 40°C

Hold up time: 16 ms minimum at full load & normal input voltage

Power good signal: On delay 100 ms to 500 ms, off delay 1 ms

Over load protection: 110 ~ 160% max.

Meet IEC-1000-3-2 CLASS D (Active PFC)

Spezifikationen Voltage: 90—264 Vac Full range

Frequenzy: 47—63 Hz

Input current: 9A (RMS) for 115 Vac

4.5A (RMS) for 230 Vac

Inrush current: 80A max. for 115 Vac

100A max. for 230 Vac

Zertifikat UL 1950, CSA 22.2 NO/ 950, TUV IEC 950

EPS12V



MRW-6420P

BESONDERHEITEN

Artikelname MRW-6420P

Beschreibungen 86 (H) x 150 (B) x 185 (T) mm

2x 40 mm DC Lüfter (Modul)

Temperature Range : Operating 0°C --- 40°C

Hold up time: 16 ms minimum at full load & 90 Vac input voltage

Power good signal: On delay 100 ms to 500 ms, off delay 1 ms

Over load protection: 110 ~ 160% max.

Meet IEC-1000-3-2 CLASS D (Active PFC)

Spezifikationen Voltage: 90—264 Vac Full range

Frequenzy: 47—63 Hz

Input current: 8A (RMS) for 115 Vac

4A (RMS) for 230 Vac

Inrush current: 60A max. for 115 Vac

80A max. for 230 Vac

Zertifikat UL 1950, CSA 22.2 NO/ 950, TUV IEC 950



RHD-6460P8

BESONDERHEITEN

Artikelname RHD-6460P8

Beschreibungen 213.2 (H) x 153.4 (B) x 183 (T) mm

2x 80 mm DC Lüfter (Modul)

Temperature Range : Operating 0°C --- 40°C

Hold up time: 16 ms minimum at full load & 90 Vac input voltage

Power good signal: On delay 100 ms to 500 ms, off delay 1 ms

Over load protection: 110 ~ 160% max.

Meet IEC-1000-3-2 CLASS D (Active PFC)

Spezifikationen Voltage: 95—264 Vac Full range

Frequenzy: 47—63 Hz

Input current: 8A (RMS) for 115 Vac

4A (RMS) for 230 Vac

Inrush current: 65A max. for 115 Vac

125A max. for 230 Vac

Zertifikat UL 1950, CSA 22.2 NO/ 950, TUV IEC 950

Raid Modul, Card Reader



NS-160



NS-170



YD-CRS5-NX

BESONDERHEITEN

Artikelname NS-160

Beschreibungen 220 (L) x 146 (B) x 126 (H) mm
1x 80x80x25mm

Spezifikationen Backplane design for integrated 4 x 3.5" SATA/SAS hard disk drive in 3 x 5.25" space
Aluminum housing, anodized surface
Individual key lock of each HDD tray for physical security
LED indicator for power and activity on each HDD tray
LED indicators for drive fail signal through host pin connec.

Zubehör 1x Enclosure, 4x HDD tray, 1x Manual CD-ROM,
16x HDD mounting screw, 2x key for HDD tray

BESONDERHEITEN

Artikelname NS-170

Beschreibungen 220 (L) x 146 (W) x 126 (H) mm
1x 80x80x25mm

Spezifikationen Backplane design for integrated 5 x 3.5" SATA/SAS hard disk drive in 3 x 5.25" space
Aluminum housing, anodized surface
Individual key lock of each HDD tray for physical security
LED indicator for power and activity on each HDD tray
LED indicators for drive fail signal through host pin connec.

Zubehör 1x Enclosure, 5x HDD tray, 1x Manual CD-ROM,
20x HDD mounting screw, 2x key for HDD tray

BESONDERHEITEN

Artikelname YD-CRS5-NX

Beschreibungen 101.5 (W) x 25 (H) x 100 (D) mm

Spezifikationen Front USB 2.0

Support Plug & Play and Hot-Swap. (ME/2000/XP)
Support auto-detecting slot with card inserted.
Support slot to slot read/write operation.
High efficiency card interface hardware engine for data transfer

Farbe Schwarz, Silber