A case should be...

- Thermally-advantaged chassis
- ATX V2.1 compliant
- Excellent ventilation & EMI containment
- Low acoustic level
- Front access USB2.0 , Audio & IEEE1394
- OEM / ODM available

"Cetus "
YY-5601

"Scutum"
YY-5602

Meets lower ambient temperature guideline of 38°C for Pentium 4 3G + Generation

Control panel on the top

Design-in CDROM cover to keep the system good looking

Max drive capacity, totally 10 drive bays

1x12cm Cooling Fan (Optional) reserved for rear - mounted

Screw - less Add - on cards assembly

Accessory box location

Venetian blind with dust-filter 1x12cm cooling fan (Optional) reserved for front - mounted

Screw - less HDD assembly

This is the illustration for structure of YY-5601 middle tower along with various front bezels

Rear view

U - seam designed side cover

Intrusion switch reserved (optional)

Screw - less lockable side panel

Optoinal air guide for better thermal solution

SPECIFICATIONS
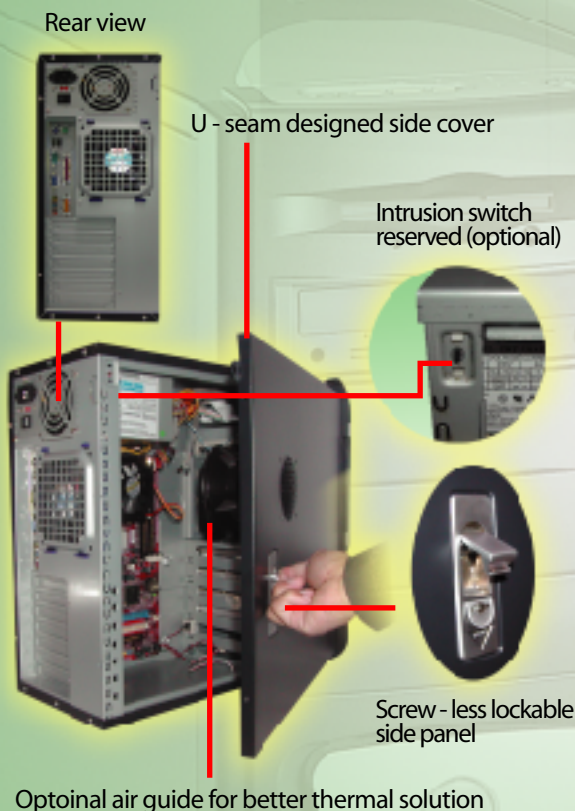
Case dimension:	200mm W x 493mm D x 440mm H
	7.9"W x 19.4"D x 17.3" H
Motherboard configuration:	Micro ATX/ATX
Drive configuration:	10 drive bays : 4-5.25" exposed
	1-3.5" exposed
	5-3.5" hidden
Optional system cooling fan:	2 x 12cm fans front and rear-mounted
Expansion slots:	7slots
Speaker:	buzzer
Front panel control:	Power switch,Reset switch,Power LED,
	HDD LED,USB
Materials:	Recyclable materials; Steel chassis
	Flame retardant plastic parts and front bezel(HB)
Emissions:	Designed to meet FCC class B-47 CFR
Net Weight:	7.5kg / 10.1 lbs
Color:	Black , Cool Gray
Power Supply:	Available with power supply
	Standard PS2/ATX 200W/230W/250W/300W
	UL, CSA, TUV, CE approved, DoC compliance
Options:	2 x 12cm fans (front & rear mounted),
	Intrusion switch, Air Guide
Packing /Shipping:	348pcs / 20' Container
	732pcs / 40' Container
	780pcs / 40' HQ Container

All brand names and trademarks are the property of their respective owners. Specifications are subject to change without prior notice.

YEONG YANG

A case should be...

ZZ16-56xx-A